


## DATA SHEET

DIESEL GENERATOR 1650KW  
 MODEL#FDK-P1650/H1  
 50HZ/1500RPM  
 PERKINS MODEL: 4016TAG1A

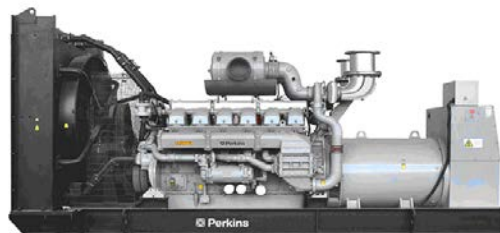

### General Features:

- ◆ All qualified generator sets are subjected to a comprehensive performance test which includes 50% load, 70% load, 100% load, 110% load and to check, verify that all control systems, alarm and shut-down protection.
- ◆ Equipped with battery charger and 24V high performance maintenance-free lead-acid starting batteries and connecting cables.
- ◆ Stainless galvanized zinc plates with strong corrosion-proof.
- ◆ Vibration isolators between the engine/alternator and base frame.
- ◆ Equipped with industrial silencer and flexible exhaust hose.
- ◆ Designed to comply with ISO8528/GB2820.
- ◆ Powered by Perkins engine and coupled with Stamford alternator.
- ◆ Water jacket preheater, oil heater and double air cleaner, etc. are available.

### FDK Diesel Generator Set Data

Genset Model	FDK-P1650/H1
Prime Power	1500KW/1875KVA
Standby Power	1650KW/2062KVA
Output Frequency / Rated speed	50Hz/1500rpm
Rated Voltage	230V/400V

Engine Make	Perkins UK
Engine Model	4016TAG1A
Alternator model	Stamford PI734E
Control System	DSE7320
Phase	Three

(1) **Prime power:** The rating is available for an unlimited of annual operating hours in variable load applications, in accordance with ISO8528-1.A 10% overload is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046-1.

(2) **Standby power:** The rating is applicable for supplying emergency power in variable load applications for up to 200 hours per year in accordance with ISO8528-1. Overload is not allowed.

(3) **Rated voltage:** available with customer requirement.

### Engine Specifications (DETAILED in APPENDIX)

Engine Model	4016TAG1A
Engine Manufacturer	Perkins UK
Cylinder quantity	16
Cylinder Arrangement	Vee 60°
Cycle	4
Aspiration	Turbo charged

Bore x Stroke (mm x mm)	160x190
Displacement	61.123 L
Compression Ratio	13.6:1
Prime power / Speed (KW/RPM)	1588kw/1500
Standby power/ Speed (KW/RPM)	1741kw/1500
Governor type	Electronic



ISO9001:2008

FDK reserves the right to change the specifications and designs without notice.

Piston Speed	9.5m/s
Typical genset electrical output	1476kw
Total Lubrication System Capacity (L)	213
Total Coolant Capacity (L)	316

Fuel Consumption at 100% load (L/HOUR)	383 at rated speed
Starter motor	24V
Alternator	24V
Minimum cranking speed.	120 rpm

## Alternator Specifications

Alternator model	PI734E
Alternator manufacturer	STAMFORD
Exciter type	Single bearing, Brushless, Self-excited
Rated output prime power	1900KVA
Rated speed	1500 rpm
Rated frequency	50Hz

Number of phase	3
Rated voltage	400V (Available with custom requirements)
Power factor	0.8
Voltage regulation NL-FL	±1%
Insulation grade	H
Protection grade	IP23

**Alternator option: Leroy Somer, MECC, Marathon, Engga, Faraday**

## Control System DSE7320 (DETAILED in INSTRUCTION)

DSE7320 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, breaker control and automatically start the engine when the mains are abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

### FEATURES

- ◆ Microprocessor control, with high stability and credibility.
- ◆ Monitoring and measuring operational parameters of the mains supply and genset.
- ◆ Indicating operation status, fault conditions, all parameters and alarms.
- ◆ Multiple protections; multiple parameters display, like pressure, temp. etc.
- ◆ Manual, automatic and remote work mode selectable.
- ◆ Real time clock for time and date display, overall runtime display, 250 log entries.
- ◆ Overall power output display.
- ◆ Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- ◆ Communication with PC via RS485 OR RS232 interface, using MODBUS protocol.

## Soundproof Enclosure Specification

FDK silent generator is designed by professional acoustic engineers based on years of experience. Now we can make the noise of the generator less than 80-85dB(A) at 1m, or 70-75dB(A) at 7m, 60-65dB(A) at 15m.

### FEATURES

- ◆ Multi-way air intake and exhaust guarantee the power performance of the generator.
- ◆ Large-scale impedance combined type silencer effectively reduce noise of the generator.
- ◆ Internal high performance rubber damper and flexible materials reduce vibration.
- ◆ Base mounted fuel tank supports the generator running for 8 hours.



ISO9001:2008

FDK reserves the right to change the specifications and designs without notice.

## Optional

Generator set	Alternator	Low environment Temp	ATS
<input type="checkbox"/> Open generator set <input type="checkbox"/> Silent generator set <input type="checkbox"/> Trailer generator set <input type="checkbox"/> ABB MCCB circuit breaker	<input type="checkbox"/> Stamford <input type="checkbox"/> Marathon <input type="checkbox"/> Mecc Alte <input type="checkbox"/> Leroy Somer <input type="checkbox"/> Farady <input type="checkbox"/> Engga	<input type="checkbox"/> Water heater <input type="checkbox"/> Oil heater <input type="checkbox"/> Battery heater	<input type="checkbox"/> CHINT <input type="checkbox"/> SCHNEIDER <input type="checkbox"/> ABB
Fuel system	Control system	Voltage	Synchronized system
<input type="checkbox"/> 12hrs base tank <input type="checkbox"/> 24hrs base tank <input type="checkbox"/> Dual wall base fuel tank <input type="checkbox"/> Outside fuel tank	<input type="checkbox"/> AMF function <input type="checkbox"/> ATS control cabinet <input type="checkbox"/> DSE7320 <input type="checkbox"/> DSE7510 <input type="checkbox"/> GU620A	<input type="checkbox"/> 415/240V <input type="checkbox"/> 400/230V <input type="checkbox"/> 380/220V <input type="checkbox"/> 220/127V <input type="checkbox"/> 200/115V	<input type="checkbox"/> CHINT Cabinet <input type="checkbox"/> SCHNEIDER Cabinet <input type="checkbox"/> DSE8610 Module <input type="checkbox"/> COMAQ Module <input type="checkbox"/> DEIF Module

## Dimension & Weight

### Open

Overall Size: LxWxH (mm)	7000x2300x2800
Weight (kg)	9800

### Soundproof Version

Overall Size: LxWxH (mm)	40FT Container
Weight (kg)	13500

## Sales Promises

- ◆ FDK provides a full line of brand new and high quality products. Each and every unit is strictly factory tested before shipment.
- ◆ Quality warranty is according to our standard conditions: 12 months from BL date or 1000 running hours, whichever comes first.
- ◆ Service and parts are available from FDK or distributors in your location.
- ◆ FDK guarantee use **BRAND NEW & GENUINE MACHINE.**



# Technical Data

## 4000 Series

# 4016TAG1A

# 4016TAG2A

### Diesel Engine - Electrounit

#### Basic technical data

Number of cylinders ... 16  
 Cylinder arrangement ... 60° Vee  
 Cycle ... 4 stroke, compression ignition  
 Induction system ... Turbocharged  
 Compression ratio ... 13,6:1 nominal  
 Bore ... 160 mm  
 Stroke ... 190 mm  
 Cubic capacity ... 61,123 litres  
 Direction of rotation ... Anti-clockwise viewed on flywheel  
 Firing order ... 1<sup>A</sup>, 1<sup>B</sup>, 3<sup>A</sup>, 3<sup>B</sup>, 7<sup>A</sup>, 7<sup>B</sup>, 5<sup>A</sup>, 5<sup>B</sup>, 8<sup>A</sup>, 8<sup>B</sup>, 6<sup>A</sup>, 6<sup>B</sup>, 2<sup>A</sup>, 2<sup>B</sup>, 4<sup>A</sup>, 4<sup>B</sup>  
 Cylinder 1 furthest from flywheel

#### Cylinders designated 'A' are on the left side of the engine when viewed from the front (opposite end to flywheel)

Total weight Electrounit (engine only) ... (dry) 5570 kg  
 ... (wet) 5847 kg  
 Overall dimensions ... Height 2128 mm  
 ... Length 3302 mm  
 ... Width 1723 mm  
 Moment of inertia ... Engine 11,15 kgm<sup>2</sup>  
 ... Flywheel 9,57 kgm<sup>2</sup>  
 Cyclic irregularity for engine/flywheel (Prime power):  
 4016TAG1A ... 1500 rev/min ... 1,300  
 4016TAG2A ... 1500 rev/min ... 1,277

#### Ratings

Steady state speed stability at constant load ... ± 0,25%  
 Electrical ratings are based on average alternator efficiency and are for guidance only (0,8 power factor being used).

#### Operating point

Engine speed ... 1500 rev/min  
 Static injection timing ... see engine number plate  
 Cooling water exit temperature ... <98 °C

#### Fuel data

To conform to BS2869 class A1, A2.

#### Performance

Estimated sound pressure level 1500 rev/min ... 106/112 d(B)A

**Note:** All data based on operation to ISO 3046/1, BS 5514 and DIN 6271 standard reference conditions.

#### Test conditions

Air temperature ... 25 °C  
 Barometric pressure ... 100 kPa  
 Relative humidity ... 30%  
 Air inlet restriction at maximum power (nominal) ... 2,5 kPa  
 Exhaust back pressure (nominal) ... 3,0 kPa

#### General installation 4016TAG1A

Designation	Units	50Hz 1500 rev/min			60Hz 1800 rev/min		
		Continuous Baseload	Prime Power	Standby Maximum	Continuous Baseload	Prime Power	Standby Maximum
Gross engine power	kWb	1270	1588	1741	-	-	-
Fan power	kWm	51			-	-	-
Net engine power	kWm	1219	1537	1690	-	-	-
BMEP gross	bar	16,6	20,8	22,8	-	-	-
Combustion air flow	m <sup>3</sup> /min	107	132	140	-	-	-
Exhaust gas temperature max (after turbo)	°C	400	439		-	-	-
Exhaust gas flow max (after turbo)	m <sup>3</sup> /min	252	343		-	-	-
Boost pressure ratio max (after turbo)	-	3,0	3,30	3,50	-	-	-
Mechanical efficiency	%	88	91	92	-	-	-
Overall thermal efficiency	%	41	41	41	-	-	-
Friction power and pumping losses	kWm	160			-	-	-
Mean piston speed	m/s	9,5			-	-	-
Engine coolant flow (min)	l/s	19			-	-	-
Typical Genset Electrical Output 0,8 pf 25 °C (100 kPa)	kVA	1463	1844	2028	-	-	-
	kWe	1170	1476	1622	-	-	-
Assumed alternator efficiency	%	96			-	-	-

## General installation 4016TAG2A

Designation	Units	50Hz 1500 rev/min			60Hz 1800 rev/min		
		Continuous Baseload	Prime Power	Standby Maximum	Continuous Baseload	Prime Power	Standby Maximum
Gross engine power	kWb	1413	1766	1937	-	-	-
Fan power	kWm	51			-	-	-
Net engine power	kWm	1362	1715	1886	-	-	-
BMEP gross	bar	18,5	23,1	25,4	-	-	-
Combustion air flow	m <sup>3</sup> /min	117	137	145	-	-	-
Exhaust gas temperature max (after turbo)	°C	450	493		-	-	-
Exhaust gas flow (max)	m <sup>3</sup> /min	275	387		-		
Boost pressure ratio	-	3,0	3,49	3,80	-	-	-
Mechanical efficiency	%	88	92	92	-	-	-
Overall electrical efficiency	%	41	40	40	-	-	-
Friction power and pumping losses	kWm	160			-	-	-
Mean piston speed	m/s	9,5			-		
Engine coolant flow (min)	l/s	19			-	-	-
Typical Genset Electrical Output 0,8 pf 25 °C (100 kPa)	kVA	1634	2058	2263	-	-	-
	kWe	1307	1646	1811	-	-	-
Assumed alternator efficiency	%	96			-	-	-

**Note:** Not to be used for CHP design purposes. (Indicative figures only). Consult Perkins Engines Co. Ltd. Assumes complete combustion.

**Prime Power rating** is available for unlimited hours per year with a variable load of which the average engine load factor is 80% of the published prime power rating. **Standby Power rating** is for the supply of emergency power at variable load for the duration of the non-availability of the mains power supply. NO OVERLOAD capacity is available at this rating. Engines must not be allowed to have facilities for parallel operation with the mains supply. This rating should be applied only when reliable mains power is available. Should this not be the case then refer to Prime Power rating. A standby rated engine should be sized for an average load factor of 80% based on published standby rating for 500 operating hours per year. Standby ratings should never be applied except in true emergency power failure conditions.

On 16 cylinder engines used for baseload operation, the following items must be incorporated:

1. Auto lubricating oil pump (extra price, see options).
2. Centrifugal by-pass filter to be baseframe mounted (extra price, see options).
3. Electrically driven radiators on separate baseframe (customer supply).
4. Start/stop sequence as follows:

START - 4 minutes priming.

- 2 minutes start and no load 1500 rev/min.
- Synchronise and ramp to full load over 3 minutes.

STOP - Ramp down to no load 1500 rev/min.

- 5 minutes no load and running.
- Stop engine and run oil priming pump for 4 minutes.

## Energy balance

**Note:** Not to be used for CHP design purposes. (Indicative figures only). Consult Perkins Engines Co Ltd. Assumes complete combustion.

### 4016TAG1A

	Units	1500 rev/min			1800 rev/min		
		Continuous Baseload	Prime Power	Standby Maximum	Continuous Baseload	Prime Power	Standby Maximum
Energy in fuel	kWt	3106	3846	4297	-	-	-
Energy in power output (gross)	kWb	1270	1588	1741	-	-	-
Energy to cooling fan	kWm	51	51	51	-	-	-
Energy in power output (net)	kWm	1219	1537	1690	-	-	-
Energy to exhaust	kWt	947	1079	1276	-	-	-
Energy to coolant and oil	kWt	480	586	629	-	-	-
Energy to radiation	kWt	58	103	107	-	-	-
Energy to charge coolers	kWt	363	490	544	-	-	-

### 4016TAG2A

	Units	1500 rev/min			1800 rev/min		
		Continuous Baseload	Prime Power	Standby Maximum	Continuous Baseload	Prime Power	Standby Maximum
Energy in fuel	kWt	3466	4361	4908	-	-	-
Energy in power output (gross)	kWb	1413	1766	1937	-	-	-
Energy to cooling fan	kWm	51	51	51	-	-	-
Energy in power output (net)	kWm	1362	1716	1886	-	-	-
Energy to exhaust	kWt	1048	1245	1490	-	-	-
Energy to coolant and oil	kWt	517	660	721	-	-	-
Energy to radiation	kWt	68	130	150	-	-	-
Energy to charge coolers	kWt	420	560	610	-	-	-

## Cooling system

Recommended coolant: 50% inhibited ethylene glycol or 50% inhibited propylene glycol and 50% clean fresh water. For combined heat and power systems and where there is no likelihood of ambient temperatures below 10 °C then clean 'soft' water may be used, treated with 1% by volume of Perkins inhibitor in the cooling system. The inhibitor is available in bottles under Perkins Part No. 21825 735.

Maximum jacket water pressure in crankcase ... .. 1,7 bar

The following is a guide based on ambient air conditions of 52 °C on a Perkins supplied radiator.

Total coolant capacity:

Electrounit (engine only) ... .. 95 litres

ElectropaK (engine/radiator) .. .. 316 litres

Pressure cap setting .. .. 0,69 bar

Fan .. .. Incorporated in radiator

Diameter .. .. 1905 mm (pusher)

Ambient cooling clearance (open ElectropaK Prime power) based on air temperature at fan 3 °C above ambient.

### 4016TAG1A

Maximum additional restriction (duct allowance) to cooling airflow (Prime power) and resultant minimum airflow					
Ambient clearance 50% glycol		Duct allowance mm H <sub>2</sub> O		Min airflow m <sup>3</sup> /min	
rev/min		rev/min		rev/min	
1500	1800	1500	1800	1500	1800
52 °C	-	17	-	2394	-

### 4016TAG2A

Maximum additional restriction (duct allowance) to cooling airflow (Prime power) and resultant minimum airflow					
Ambient clearance 50% glycol		Duct allowance mm H <sub>2</sub> O		Min airflow m <sup>3</sup> /min	
rev/min		rev/min		rev/min	
1500	1800	1500	1800	1500	1800
52 °C	-	15	-	2430	-

Coolant pump speed and

method of drive .. .. 1,4 x e rev/min gear driven

Maximum static pressure head on pump

above engine crank centre line .. .. 7 m

Maximum external permissible restriction

to coolant pump flow .. .. 20 kPa

Thermostat operating range .. .. 71-85 °C

Shutdown switch setting .. .. 101 °C rising

Coolant immersion heater capacity .. .. 4 kW x 2

Jacket cooling water data	Units	1500 rev/min	1800 rev/min
Coolant flow	l/s	19	-
Coolant exit temperature (max)	°C	98	-
Coolant entry temperature (min)	°C	70	-
Coolant entry temperature (max)	°C	80	-

## Lubrication system

Recommended lubricating oil to conform with the specification of API CG4 15W/40.

Lubricating oil capacity:

Sump maximum .. .. 213 litres

Sump minimum .. .. 157 litres

Lubricating oil temperature maximum to bearings .. .. 105 °C

Lubricating oil pressure

at 80 °C temperature to bearing gallery (minimum) .. .. 0,34 MPa

Oil consumption	Units	1500 rev/min 4016TAG1A	1500 rev/min 4016TAG2A
After running-in*	g/kWhr	0,50	0,52
Oil flow rate from pump	l/s	6,70	6,70

\*Typical after 250 hours

Sump drain plug tapping size .. .. G1

Oil pump speed and method of drive .. 1,4 x e rev/min, gear driven

Oil pump flow 1500 rev/min. .... 6,70 litres/sec

Shutdown switch setting .. .. 1,93 bar falling

Normal operating angles

Fore and aft .. .. 5°

Side tilt .. .. 10°

## Fuel system

Recommended fuel .. To conform to BS2869 1998 Class A1, A2

Type of injection system .. .. Direct injection

Fuel injection pump .. .. Combined unit injector

Fuel injector .. .. Combined unit injector

Fuel injector opening pressure .. .. 234 bar

Fuel lift pump .. .. Tuthill TCH 5

Delivery/hour at 1500 rev/min .. .. 1380 litres

Delivery/hour at 1800 rev/min .. .. N/A

Heat retained in fuel to tank .. .. 12,0 kW

Temperature of fuel at lift pump to be less than .. .. 58 °C

Fuel lift pump pressure .. .. 3,0 bar

Fuel lift pump maximum suction head .. .. 2,5 m

Fuel lift pump maximum pressure head (see Installation Manual)

Fuel filter spacing .. .. 10 microns

Governor type .. .. Electronic

Torque at the governor output shaft .. .. 1,631 kgm

Static injection timing .. .. See engine number plate

Tolerance on fuel consumption .. .. To ISO 8528-1 1993

### 4016TAG1A

Fuel consumption (gross)				
Designation	g/kWh		Litres/hr	
	1500	1800	1500	1800
At Standby Max power rating	207	-	424	-
At Prime Power rating	205	-	383	-
At Continuous Baseload rating	199	-	297	-
At 75% of Prime Power rating	198	-	277	-
At 50% of Prime Power rating	198	-	185	-
At 25% of Prime Power rating	218	-	102	-

### 4016TAG2A

Fuel consumption (gross)				
Designation	g/kWh		Litres/hr	
	1500	1800	1500	1800
At Standby Max power rating	212	-	483	-
At Prime Power rating	209	-	434	-
At Continuous Baseload rating	205	-	341	-
At 75% of Prime Power rating	203	-	316	-
At 50% of Prime Power rating	202	-	210	-
At 25% of Prime Power rating	212	-	110	-

## Induction system

Maximum air intake restriction of engine:

Clean filter . . . . . 127 mm H<sub>2</sub>O  
 Dirty filter . . . . . 380 mm H<sub>2</sub>O  
 Air filter type . . . . . MF&T 5000-00-00

## Exhaust system

Maximum back pressure for total system.

Designation	Units	1500 rev/min	1800 rev/min
4016TAG1A	mm H <sub>2</sub> O	949	-
4016TAG2A	mm H <sub>2</sub> O	673	-

Exhaust outlet flange size . . . . . 2 x 254 mm (table 'D')  
 For recommended pipe sizes, refer to the Installation Manual.

## Electrical system

Type . . . . . Insulated return  
 Alternator . . . . . 24 volts with integral regulator  
 Alternator output . . . . . 40 amps at a stabilised output 28 volts at  
 20 °C ambient  
 Starter motor . . . . . 24 volts  
 Starter motor power . . . . . 16,4 kW  
 Number of teeth on flywheel . . . . . 156  
 Number of teeth on starter motor . . . . . 12  
 Minimum cranking speed at (0 °C) . . . . . 120 rev/min  
 Pull-in current of each starter motor solenoid  
 . . . . . 30 amps at 24 volts  
 Hold-in current of each starter motor solenoid each  
 . . . . . 9 amps at 24 volts  
 Engine stop solenoid . . . . . 24 volts  
 Pull-in current of stop solenoid . . . . . 60 amps at 24 volts  
 Hold-in current of stop solenoid . . . . . 1,1 amps at 24 volts

## Engine mounting

Position of centre of gravity (wet engine) forward from rear  
 face of crankcase . . . . . 1117 mm  
 Engine vertical centre line above crankshaft centre line . . . . . 50 mm  
 Maximum additional load applied to flywheel due to all rotating  
 components . . . . . 850 kg

## Starting requirements



Temperature range	
<b>Range</b> Down to 0 °C (32 °F)	Oil: API CG4 15W/40
	Starter: 2 x 24V
	Battery: 4 x 12 volts x 286 Ah
	Max breakaway current: 2000 amps
	Cranking current: 957 amps
	Aids: Not necessary
	Starter cable size: 120 mm <sup>2</sup> Maximum length: 6 m

### Notes:




- Battery capacity is defined by the 20 hour rate at 0 °C.
- The oil specification should be for the minimum ambient temperature as the oil will not be warmed by the immersion heater.
- Breakaway current is dependent on battery capacity available. Cables should be capable of handling the transient current which may be up to double the steady cranking current.



**TYPICAL ENGINE**

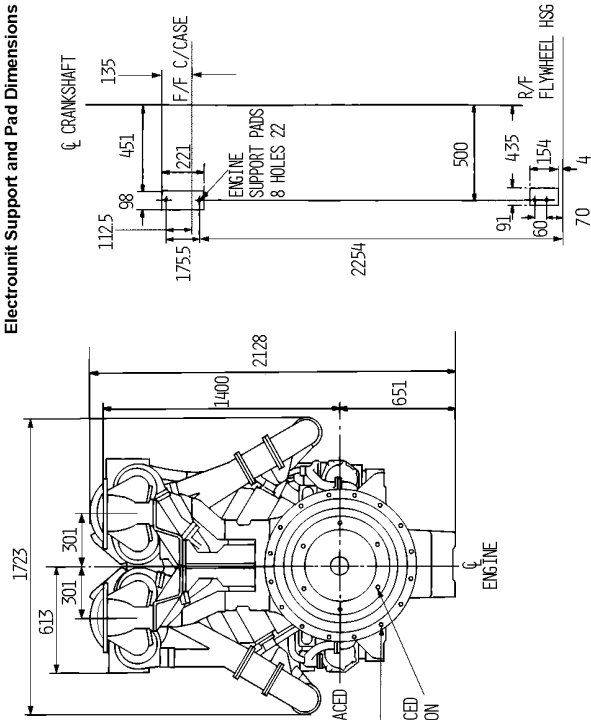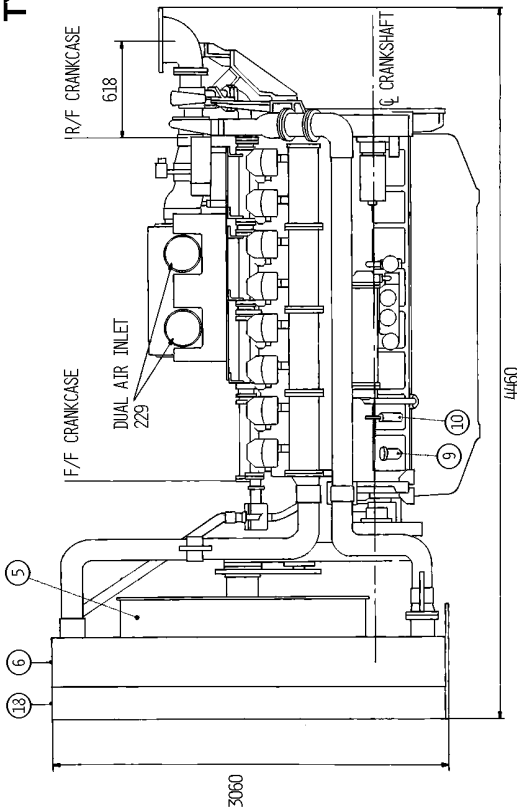


16 HOLES EQUALLY SPACED  
1/2 UNC-2B ON  
851 P.C.D.  
6 HOLES EQUALLY SPACED  
5/8 UNC-2B 30 DEEP ON  
543 P.C.D.

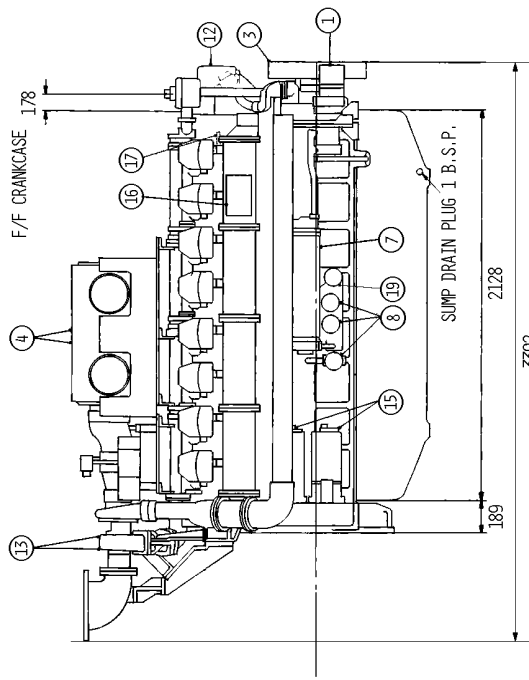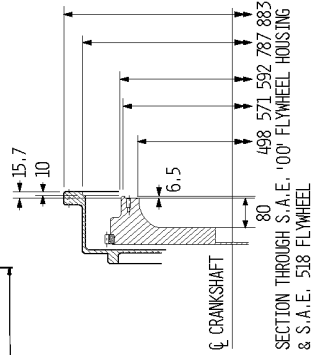

THIS DRAWING SHOWS APPROX DIMENSIONS ONLY. FOR INSTALLATION DETAILS, G.A. DRAWINGS MUST BE OBTAINED FROM PERKINS ENGINES COMPANY STAFFORD LTD A 52°C AIR AMBIENT RADIATOR CAN BE SUPPLIED AS AN OPTION.

DIM 021

ITEM	
1	ALTERNATOR
2	BREATHER
3	DAMPERS
4	AIR CLEANERS
5	FAN
6	RADIATOR (COVERED)
7	OIL COOLER
8	LUBRICATING OIL FILTERS
9	OIL FILLER
10	DIPSTICK
11	STOP SOLENOID
12	GOVERNOR ACTUATOR
13	TURBOCHARGERS
14	COOLANT PUMP
15	24V STARTER
16	GOVERNOR CONTROL BOX
17	FUEL LEAK OFF
18	CHARGE COOLER
19	FUEL FILTER

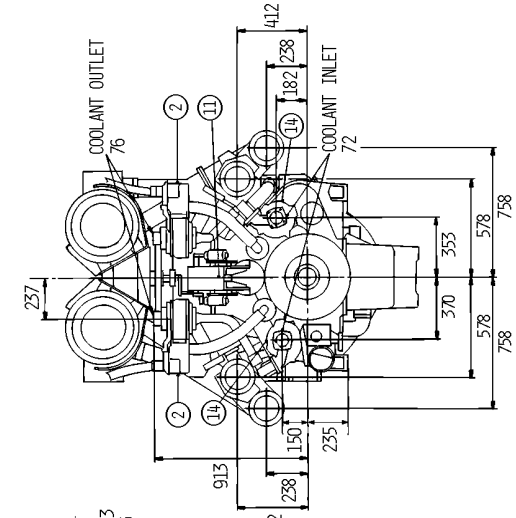

**4016TAG1A/4016TAG2A DIESEL ENGINES**

## Load acceptance (cold)

### 4016TAG1A 1500 rev/min

Initial load application when engine reaches rated speed (15 seconds max after engine starts to crank)				2 <sup>nd</sup> Load application Immediately after engine has recovered to rated speed (5 seconds after initial load application)			
Prime power %	Load kWm/kWe	Transient frequency deviation %	Frequency recovery time seconds	Prime power %	Load kWm/kWe	Transient frequency deviation %	Frequency recovery time seconds
67	1031/990	≤ -10	5	33	506/486	≤ -10	5

### 4016TAG2A 1500 rev/min

Initial load application when engine reaches rated speed (15 seconds max after engine starts to crank)				2 <sup>nd</sup> Load application Immediately after engine has recovered to rated speed (5 seconds after initial load application)			
Prime power %	Load kWm/kWe	Transient frequency deviation %	Frequency recovery time seconds	Prime power %	Load kWm/kWe	Transient frequency deviation %	Frequency recovery time seconds
57	977/938	≤ -10	5	43	738/708	≤ -10	5

Above complies with requirements of Classifications 3 & 4 of ISO 8528-12 and G2 operating limits stated in ISO 8528-5.

The above figures were obtained under test conditions as follows:

Engine block temperature . . . . . 45 °C

Alternator efficiency... . 96%

Minimum ambient temperature . . . . . 10 °C

Isochronous Governing

Under Frequency Roll Off (UFRO) set to 1 Hz below rated frequency

Typical alternator inertia . . . . . 50 Kg<sup>m</sup><sup>2</sup>

All tests were conducted using an engine which was installed and serviced to Perkins Engines Company Limited recommendations.

**Noise level**


The figures for total noise levels are typical for an engine running at Prime Power rating in a semi-reverberant environment and measured at a distance of one metre from the periphery of the engine.

**Octave analysis**


The following histograms show an octave band analysis at the position of the maximum noise level.

**Total noise level**


Sound pressure level re:  $-20 \times 10^{-6}$  pa  
 Speed 1500 r/min.....Ambient noise level 75 d(B)A.  
 Octave analysis performed at the position of maximum noise.

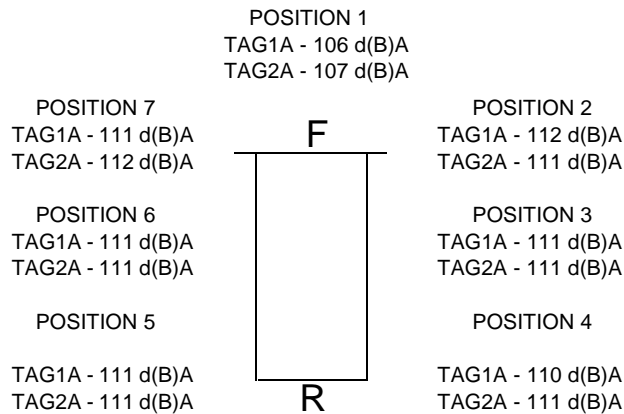

**4016TAG1A**

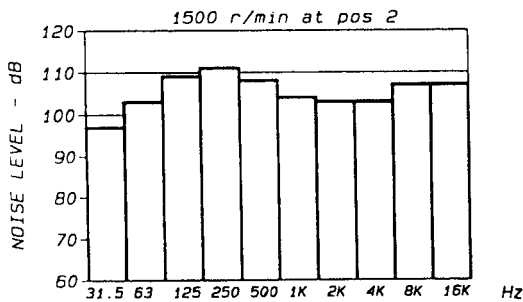

**4016TAG2A**

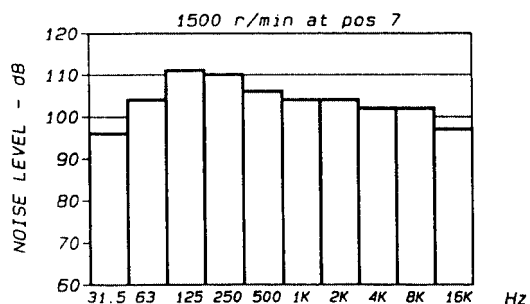

The information given on technical data sheets are for standard ratings only. For ratings other than shown contact Perkins Engines Company Limited, Stafford.

**Notes**



**Perkins Engines Company Limited**

Stafford ST16 3UB United Kingdom  
 Telephone +44 (0)1785 223141  
 Fax +44 (0)1785 215110  
 www.perkins.com

All information in the document is substantially correct at the time of printing but may be subsequently altered by the company.

Distributed by

[www.fdkenergy.com](http://www.fdkenergy.com)