


# DATA SHEET

DIESEL GENERATOR 1100KW

MODEL#FDK-CC1375/H1

50HZ/1500RPM

CUMMINS MODEL: QSK38-G5

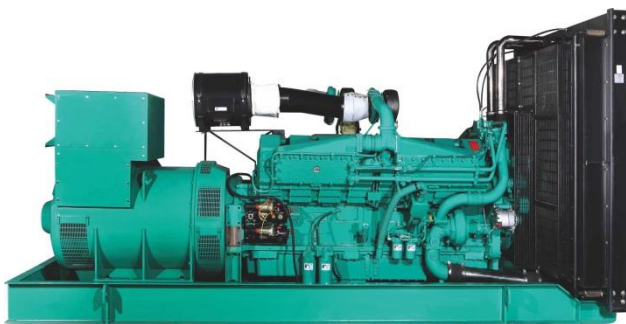

## General Features:

- ♦ All qualified generator sets are subjected to a comprehensive performance test which includes 50% load, 70% load, 100% load, 110% load and to check, verify that all control systems, alarm and shut-down protection.
- ♦ Equipped with battery charger and 24V high performance maintenance-free lead-acid starting batteries and connecting cables.
- ♦ Stainless galvanized zinc plates with strong corrosion-proof.
- ♦ Vibration isolators between the engine/alternator and base frame.
- ♦ Equipped with industrial silencer and flexible exhaust hose.
- ♦ Designed to comply with ISO8528/GB2820.
- ♦ Powered by Cummins engine and coupled with Stamford alternator.
- ♦ Water jacket preheater, oil heater and double air cleaner, etc. are available.

## FDK Diesel Generator Set Data

|                                |                |
|--------------------------------|----------------|
| Genset Model                   | FDK-CC1375/H1  |
| Prime Power                    | 1000KW/1250KVA |
| Standby Power                  | 1100KW/1375KVA |
| Output Frequency / Rated speed | 50Hz/1500rpm   |
| Rated Voltage                  | 230V/400V      |

|                  |                  |
|------------------|------------------|
| Engine Make      | Cummins CHINA    |
| Engine Model     | QSK38-G5         |
| Alternator model | Stamford LVI634G |
| Control System   | DSE7320          |
| Phase            | Three            |

(1) **Prime power:** The rating is available for an unlimited of annual operating hours in variable load applications, in accordance with ISO8528-1.A 10% overload is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046-1.

(2) **Standby power:** The rating is applicable for supplying emergency power in variable load applications for up to 200 hours per year in accordance with ISO8528-1. Overload is not allowed.

(3) **Rated voltage:** available with customer requirement.

## Engine Specifications (DETAILED in APPENDIX)

|                      |                       |
|----------------------|-----------------------|
| Engine Model         | QSK38-G5              |
| Engine Manufacturer  | Cummins<br>CHINA CCEC |
| Cylinder quantity    | 16                    |
| Cylinder Arrangement | 60° Vee               |
| Cycle                | 4                     |

|                               |               |
|-------------------------------|---------------|
| Aspiration                    | Turbo-charged |
| Bore x Stroke (mm x mm)       | 159×159       |
| Displacement                  | 37.7L         |
| Compression Ratio             | 15:1          |
| Prime power / Speed (KW/RPM)  | 1107kw/1500   |
| Standby power/ Speed (KW/RPM) | 1224kw/1500   |



ISO9001:2008

FDK reserves the right to change the specifications and designs without notice.

|                                   |                 |  |                |
|-----------------------------------|-----------------|--|----------------|
| Type Injection System             | Cummins<br>MCRS | Fuel Consumption at 100% load<br>(g/KWh) | 211 at 1500rpm |
| Piston Speed                      | 7.9m/s          | Starter motor                            | DC24V          |
| Friction Energy Output            | 86kw            | Low idle                                 | 700-900pm      |
| Total Lubrication System Capacity | 170.3L          | Coolant Capacity (L)                     | 106            |

**Alternator Specifications**

|                          |   |                          |   |
|--------------------------|---|--------------------------|---|
| Alternator model         | LVI634G                                 | Number of phase          | 3   |
| Alternator manufacturer  | STAMFORD                                | Rated voltage            | 400V (Available with custom requirements) |
| Exciter type             | Single bearing, Brushless, Self-excited | Power factor             | 0.8                                       |
| Rated output prime power | 1250KVA                                 | Voltage regulation NL-FL | ±1%                                       |
| Rated speed              | 1500 rpm                                | Insulation grade         | H   |
| Rated frequency          | 50Hz                                    | Protection grade         | IP23                                      |

**Alternator option: Leroy Somer, MECC, Marathon, Engga, Faraday****Control System DSE7320 (DETAILED in INSTRUCTION)**

DSE7320 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, breaker control and automatically start the engine when the mains are abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

**FEATURES**

- ♦ Microprocessor control, with high stability and credibility.
- ♦ Monitoring and measuring operational parameters of the mains supply and genset.
- ♦ Indicating operation status, fault conditions, all parameters and alarms.
- ♦ Multiple protections; multiple parameters display, like pressure, temp. etc.
- ♦ Manual, automatic and remote work mode selectable.
- ♦ Real time clock for time and date display, overall runtime display, 250 log entries.
- ♦ Overall power output display.
- ♦ Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- ♦ Communication with PC via RS485 OR RS232 interface, using MODBUS protocol.

**Soundproof Enclosure Specification**

FDK silent generator is designed by professional acoustic engineers based on years of experience. Now we can make the noise of the generator less than 80-85dB(A) at 1m, or 70-75dB(A) at 7m, 60-65dB(A) at 15m.

**FEATURES**

- ♦ Multi-way air intake and exhaust guarantee the power performance of the generator.
- ♦ Large-scale impedance combined type silencer effectively reduce noise of the generator.
- ♦ Internal high performance rubber damper and flexible materials reduce vibration.
- ♦ Base mounted fuel tank supports the generator running for 8 hours.



ISO9001:2008

FDK reserves the right to change the specifications and designs without notice.

**Optional**

| Generator set   | Alternator  | Low environment Temp  | ATS  |
|---|---|---|--|
| <input type="checkbox"/> Open generator set<br><input type="checkbox"/> Silent generator set<br><input type="checkbox"/> Trailer generator set<br><input type="checkbox"/> ABB MCCB circuit breaker | <input type="checkbox"/> Stamford<br><input type="checkbox"/> Marathon<br><input type="checkbox"/> Mecc Alte<br><input type="checkbox"/> Leroy Somer<br><input type="checkbox"/> Farady<br><input type="checkbox"/> Engga | <input type="checkbox"/> Water heater<br><input type="checkbox"/> Oil heater<br><input type="checkbox"/> Battery heater   | <input type="checkbox"/> CHINT<br><input type="checkbox"/> SCHNEIDER<br><input type="checkbox"/> ABB   |
| Fuel system   | Control system  | Voltage   | Synchronized system  |
| <input type="checkbox"/> 12hrs base tank<br><input type="checkbox"/> 24hrs base tank<br><input type="checkbox"/> Dual wall base fuel tank<br><input type="checkbox"/> Outside fuel tank             | <input type="checkbox"/> AMF function<br><input type="checkbox"/> ATS control cabinet<br><input type="checkbox"/> DSE7320<br><input type="checkbox"/> DSE7510<br><input type="checkbox"/> GU620A                          | <input type="checkbox"/> 415/240V<br><input type="checkbox"/> 400/230V<br><input type="checkbox"/> 380/220V<br><input type="checkbox"/> 220/127V<br><input type="checkbox"/> 200/115V | <input type="checkbox"/> CHINT Cabinet<br><input type="checkbox"/> SCHNEIDER Cabinet<br><input type="checkbox"/> DSE8610 Module<br><input type="checkbox"/> COMAQ Module<br><input type="checkbox"/> DEIF Module |

**Dimension & Weight****Open**

|                             |                |
|-----------------------------|----------------|
| Overall Size:<br>L×W×H (mm) | 4900×2150×2450 |
| Weight (kg)                 | 10300          |

**Soundproof Version**

|                             |                |
|-----------------------------|----------------|
| Overall Size:<br>L×W×H (mm) | 40FT CONTAINER |
| Weight (kg)                 | 22000          |

**Sales Promises**

- ◆ FDK provides a full line of brand new and high quality products. Each and every unit is strictly factory tested before shipment.
- ◆ Quality warranty is according to our standard conditions: 12 months from BL date or 1000 running hours, whichever comes first.
- ◆ Service and parts are available from FDK or distributors in your location.
- ◆ FDK guarantee use **BRAND NEW & GENUINE MACHINE.**





## Engine Performance Data

Cummins Inc

Columbus, Indiana 47202-3005

http://www.cummins.com

Power Generation

**QSK38-G5**

**FR 6699**

Configuration  
**D233042GX03**

CPL Code  
**3267**

Revision  
**29-May-2009**

Compression Ratio: **15:1**

Fuel System: **Cummins MCERS**

Emission Certification: **U.S. EPA Tier 2, CARB Tier 2 (without Centinel)**

Displacement: **2,301 in3 (37.7 L)**


Aspiration: **Turbocharged and Aftercooled**

### Engine Ratings:

| Engine Speed | Standby Power |       | Prime Power |       | Continuous Power |     |
|--------------|---------------|-------|-------------|-------|------------------|-----|
| RPM          | bhp           | kWm   | bhp         | kWm   | bhp              | kWm |
| 1,500        | 1,641         | 1,224 | 1,484       | 1,107 | 1,250            | 932 |
| 1,800        | 1,715         | 1,279 | 1,425       | 1,063 | 1,195            | 891 |


### Engine Fuel Consumption @1,500 RPM

| Output Power            |       |       | Fuel Consumption |           |        |      |
|-------------------------|-------|-------|------------------|-----------|--------|------|
| %                       | bhp   | kWm   | lb/ bhp-h        | kg/ kWm-h | gal/hr | l/hr |
| <b>Standby Power</b>    |       |       |                  |           |        |      |
| 100                     | 1,641 | 1,224 | 0.343            | 0.209     | 79.4   | 301  |
| <b>Prime Power</b>      |       |       |                  |           |        |      |
| 100                     | 1,484 | 1,107 | 0.347            | 0.211     | 72.5   | 274  |
| 75                      | 1,113 | 830   | 0.348            | 0.212     | 54.5   | 206  |
| 50                      | 742   | 553   | 0.391            | 0.238     | 40.8   | 154  |
| 25                      | 371   | 277   | 0.407            | 0.248     | 21.3   | 81   |
| <b>Continuous Power</b> |       |       |                  |           |        |      |
| 100                     | 1,250 | 932   | 0.345            | 0.210     | 60.8   | 230  |

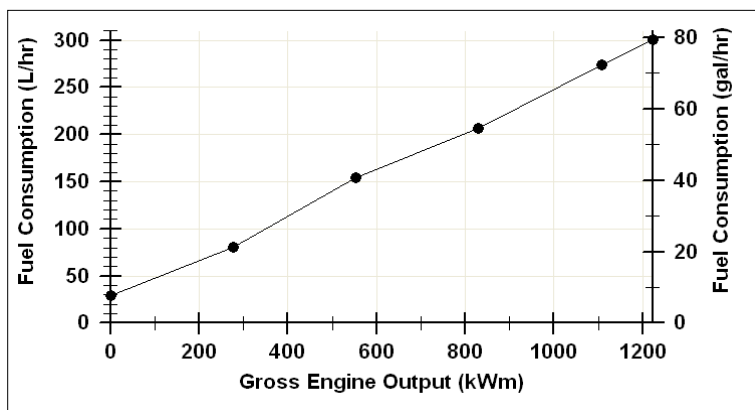

### Engine Fuel Consumption @1,800 RPM

| Output Power            |       |       | Fuel Consumption |           |        |      |
|-------------------------|-------|-------|------------------|-----------|--------|------|
| %                       | bhp   | kWm   | lb/ bhp-h        | kg/ kWm-h | gal/hr | l/hr |
| <b>Standby Power</b>    |       |       |                  |           |        |      |
| 100                     | 1,715 | 1,279 | 0.345            | 0.210     | 83.3   | 315  |
| <b>Prime Power</b>      |       |       |                  |           |        |      |
| 100                     | 1,425 | 1,063 | 0.345            | 0.210     | 69.3   | 262  |
| 75                      | 1,069 | 797   | 0.355            | 0.216     | 53.4   | 202  |
| 50                      | 713   | 532   | 0.402            | 0.245     | 40.3   | 153  |
| 25                      | 356   | 265   | 0.473            | 0.288     | 23.7   | 90   |
| <b>Continuous Power</b> |       |       |                  |           |        |      |
| 100                     | 1,195 | 891   | 0.351            | 0.214     | 59     | 223  |

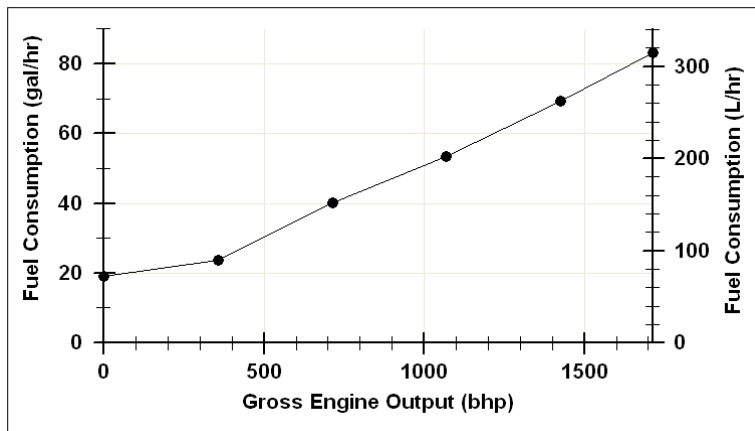

### Rating Type:

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. **STANDBY POWER RATING:** Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating. This rating should be applied where reliable utility power is available. A Standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency. **PRIME POWER RATING:** Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories: **UNLIMITED TIME RUNNING PRIME POWER:** Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year. **LIMITED TIME RUNNING PRIME POWER:** Limited Time Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating. **CONTINUOUS POWER RATING:** Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

Reference AEB 10.47 for determining Electrical Output.  
Data shown above represent gross engine performance capabilities obtained and corrected in accordance with ISO-3046 conditions of 100 kPa (29.53 in Hg) barometric pressure [110 m (361 ft) altitude], 25 °C (77 °F) air inlet temperature, and relative humidity of 30% with No. 2 diesel or a fuel corresponding to ASTM D2. Derates shown are based on 15 in H2O air intake restriction and 2 in Hg exhaust back pressure.

The fuel consumption data is based on No. 2 diesel fuel weight at 0.85 kg/litre (7.1 lbs/U.S. gal). Power output curves are based on the engine operating with fuel system, water pump and lubricating oil pump; not included are battery charging alternator, fan, optional equipment and driven components.


### Data Subject to Change Without Notice

Data Status: Final - (Measured data)


Data Tolerance: +/- 5 %

CHIEF ENGINEER: Cary J Marston


**1,500 RPM Power Derate Curves  
Standby Power**

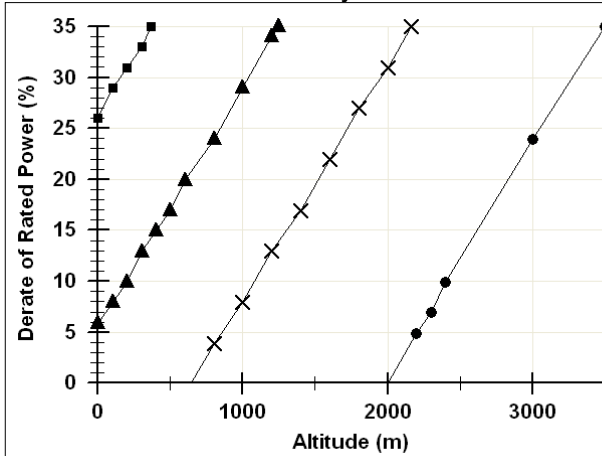


**1,800 RPM Power Derate Curves  
Standby Power**

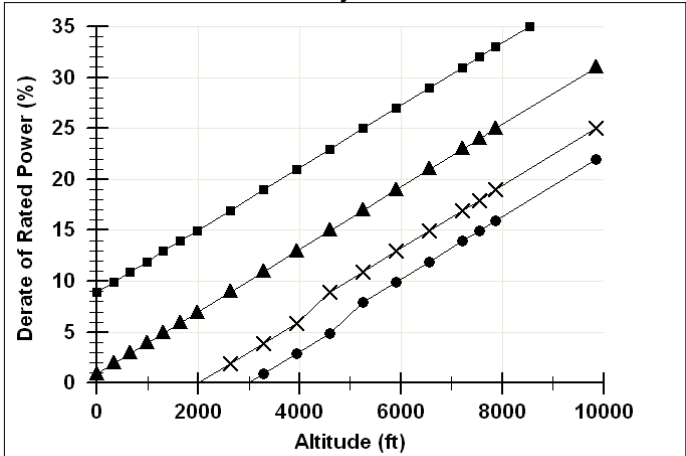


**Prime Power**

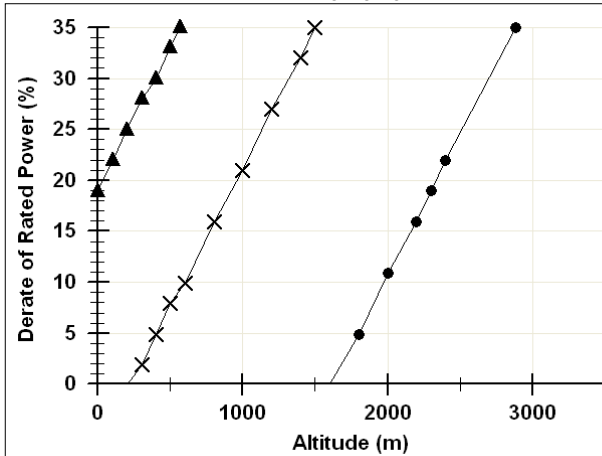


**Prime Power**

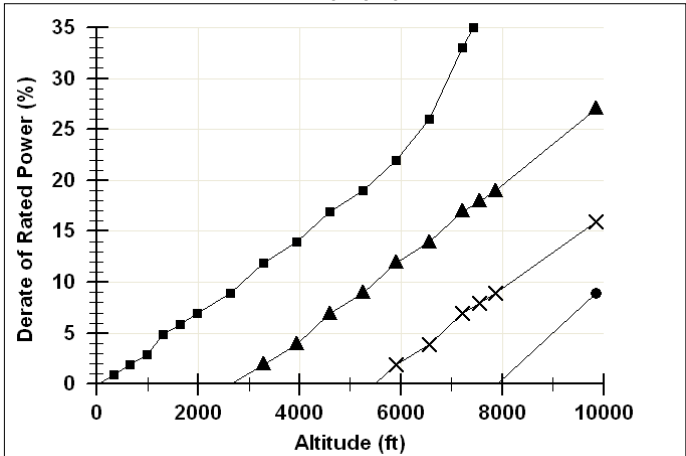

**Continuous Power**

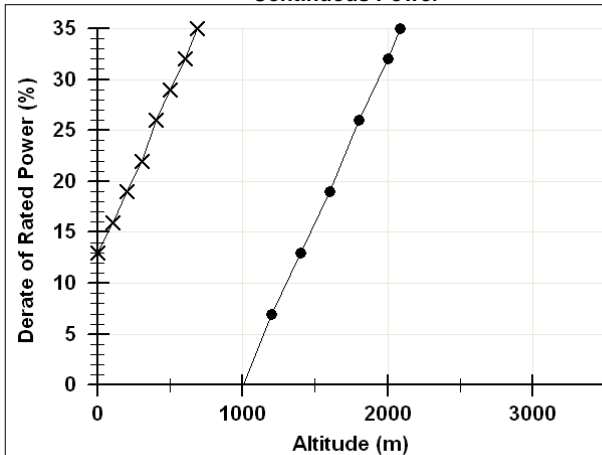

**Continuous Power**

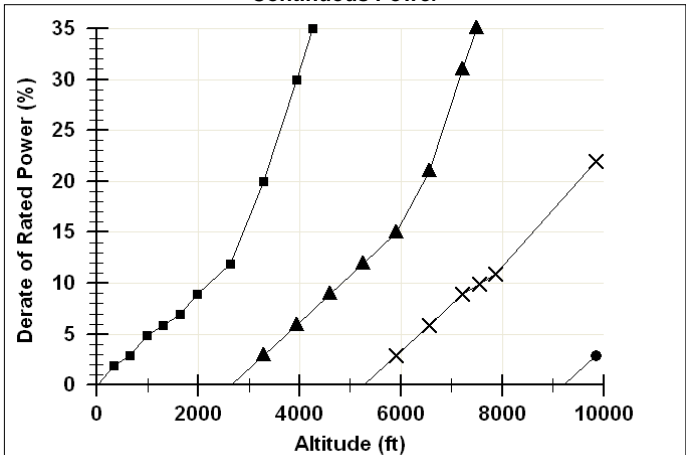

**Operation at Elevated Temperature and Altitude:**

For standby operation above these conditions, derate by an additional 7 % per 984 ft (300 m), and 21 % per 18 delta deg F (10 delta deg C)  
For prime operation above these conditions, derate by an additional 8 % per 984 ft (300 m), and 25 % per 18 delta deg F (10 delta deg C)  
For continuous operation above these conditions, derate by an additional 9 % per 984 ft (300 m), and 30 % per 18 delta deg F (10 delta deg C)

- 77 deg F (25 deg C)
- ✕ 104 deg F (40 deg C)
- ▲ 122 deg F (50 deg C)
- 140 deg F (60 deg C)

**Operation at Elevated Temperature and Altitude:**

For standby operation above these conditions, derate by an additional 3 % per 984 ft (300 m), and 8 % per 18 delta deg F (10 delta deg C)  
For prime operation above these conditions, derate by an additional 8 % per 984 ft (300 m), and 13 % per 18 delta deg F (10 delta deg C)  
For continuous above these conditions, derate by an additional 15 % per 984 ft (300 m), and 49 % per 18 delta deg F (10 delta deg C)

**General Engine Data**

|   |                              |              |
|---|------------------------------|--------------|
| Type  | Four cycle; Vee; 12 Cylinder |              |
| Aspiration                                  | Turbocharged and Aftercooled |              |
| Bore x Stroke                               | 6.25 x 6.25 in               | 159 x 159 mm |
| Displacement                                | 2,301 in3                    | 37.7 L       |
| Compression Ratio                           | 15:1                         |              |
| Approximate engine weight (wet)             | 9,039 lbm                    | 4,100 kg     |
| Moment of Inertia of Rotating Components    |                              |              |
| with FW6074 Flywheel                        | 93 in-lbf-sec**2             | 10.4 kg-m**2 |
| with FW6077 Flywheel                        | 184 in-lbf-sec**2            | 20.8 kg-m**2 |
| Center of Gravity                           |                              |              |
| from rear face of block                     | 31.54 in                     | 801 mm       |
| above crankshaft centerline                 | 6.8 in                       | 173 mm       |
| Maximum Static Loading at Rear Main Bearing | 2,000 lbm                    | 907 kg       |

**Engine Mounting**

|  |             |           |
|--|-------------|-----------|
| Maximum Bending Moment at Rear Face of Block | 4,500 lb-ft | 6,101 N-m |
|--|-------------|-----------|

**Exhaust System**

|  |         |       |
|--|---------|-------|
| Maximum back pressure at Standby Power | 2 in-Hg | 7 kPa |
|--|---------|-------|

**Air Induction System**

|   |           |         |
|---|-----------|---------|
| Maximum Intake Air Restriction                        |           |         |
| with Dirty Filter Element                             | 25 in H2O | 6.2 kPa |
| with Normal Duty Air Cleaner and Clean Filter Element | 15 in H2O | 3.7 kPa |

**Cooling System**

|  |            |        |
|--|------------|--------|
| Coolant Capacity   |            |        |
| Engine   | 112 quarts | 106 L  |
| Aftercoolers   | 24 quarts  | 22.7 L |
| Minimum pressure cap rating at sea level                   | 11 psi     | 76 kPa |
| Maximum static head of coolant above crankshaft centerline | 60 ft      | 18.3 m |

**Jacket Water Circuit Requirements**

|   |                 |                 |
|---|-----------------|-----------------|
| Maximum Coolant Friction Head External to Engine - 1,500/1,800 RPM      | 10 / 10 psi     | 68.9 / 68.9 kPa |
| Maximum Coolant Temperature (Max Top Tank Temp) for standby/prime power | 220 / 212 deg F | 104 / 100 deg C |
| Thermostat (Modulating) Range   | 180 - 202 deg F | 82 - 94 deg C   |

**Aftercooler Circuit Requirements**

|  |                 |                 |
|--|-----------------|-----------------|
| Maximum Coolant Friction Head External to Engine - 1,500/1,800 RPM                                 | 10 / 10 psi     | 68.9 / 68.9 kPa |
| Maximum coolant temperature into the aftercooler @ 25C (77F) ambient                               | 120 deg F       | 49 deg C        |
| Maximum coolant temperature into aftercooler @ Limiting Ambient conditions for standby/prime power | 170 / 160 deg F | 77 / 71 deg C   |
| Thermostat (Modulating) Range  | 115 - 135 deg F | 46 - 57 deg C   |

**Lubrication System**

|   |             |                   |
|---|-------------|-------------------|
| Oil Pressure                              |             |                   |
| @ Minimum low idle                        | 20 psi      | 138 kPa           |
| @ Governed speed                          | 50 - 70 psi | 344.7 - 482.6 kPa |
| Maximum Oil Temperature                   | 248 deg F   | 120 deg C         |
| Oil Capacity with OP Oil Pan: Low-High    | 37 - 44 gal | 140.1 - 166.6 L   |
| Total System Capacity (with Combo Filter) | 45 gal      | 170.3 L           |

**Fuel System**

|  |               |          |
|--|---------------|----------|
| Type Injection System                                  | Cummins MCRES |          |
| Maximum fuel supply restriction at fuel pump inlet     |               |          |
| with clean fuel filter element(s) at maximum fuel flow | 5 in-Hg       | 16.9 kPa |
| with dirty fuel filter element(s) at maximum fuel flow | 10 in-Hg      | 34 kPa   |
| Maximum fuel inlet temperature                         | 160 deg F     | 71 deg C |
| Maximum supply fuel flow                               | 185 gal/hr    | 700 L/hr |
| Maximum return fuel flow                               | 99 gal/hr     | 375 L/hr |

**Electrical System**

|   |             |
|---|-------------|
| System voltage                              | <u>24 V</u> |
| Minimum Recommended Battery Capacity        |             |
| cold soak at 10 deg C (50 deg F) and above  |             |
| cold soak at 0 to 10 deg C (32 to 50 deg F) |             |
| cold soak at -18 to 0 deg C (0 to 32 deg F) | 1,800 CCA   |
| Maximum starting circuit resistance         | 0.002 Ohm   |

**Cold start capability**

|  |                       |
|--|-----------------------|
| Unaided Cold Start                                 |                       |
| Minimum cranking speed                             | 150 RPM               |
| Minimum ambient temperature for unaided cold start | 45 deg F<br>7.2 deg C |

**Performance Data**

- All data is based on:
- Engine operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer; not included are battery charging alternator, fan, and optional driven components.
  - Engine operating with fuel corresponding to grade No. 2-D per ASTM D975.
  - ISO 3046, Part 1, Standard Reference Conditions of:

|                       |                       |                    |               |
|-----------------------|-----------------------|--------------------|---------------|
| Barometric Pressure : | 100 kPa (29.53 in Hg) | Air Temperature:   | 25 °C (77 °F) |
| Altitude:             | 110 m (361 ft)        | Relative Humidity: | 30%           |

Estimated Free Field Sound Pressure Level of a Typical Generator Set;

Excludes Exhaust Noise; at Rated Load and 7.5 m (24.6 ft);  
1,500/1,800 RPM

99.6 / 102.2 dBA

Exhaust Noise at Rated 1 m Horizontally From Centerline of Exhaust Pipe Outlet  
Upwards at 45%; 1,500/1,800 RPM

96.9 / 95.6 dBA

|   |                            | Standby Power |               | Prime Power   |               |
|---|----------------------------|---------------|---------------|---------------|---------------|
|   |                            | 1,800         | 1,500         | 1,800         | 1,500         |
| Governed Engine Speed   | RPM                        |               |               |               |               |
| Engine Idle Speed   | RPM                        | 700 - 900     | 700 - 900     | 700 - 900     | 700 - 900     |
| Gross Engine Power Output   | hp (kW)                    | 1,716 (1,280) | 1,641 (1,224) | 1,425 (1,063) | 1,484 (1,107) |
| Brake Mean Effective Pressure                                       | psi (kPa)                  | 327 (2,255)   | 375 (2,586)   | 272 (1,875)   | 339 (2,337)   |
| Piston Speed  | ft/min (m/s)               | 1,870 (9.5)   | 1,555 (7.9)   | 1,870 (9.5)   | 1,555 (7.9)   |
| Friction Horsepower   | hp (kW)                    | 163 (122)     | 115 (86)      | 163 (122)     | 115 (86)      |
| Engine Jacket Water Flow at Stated Friction Head external to Engine |                            |               |               |               |               |
| - 2.5 psi-2.5 psi Friction Head                                     | gpm (L/min)                | 336 (1,272)   | 274 (1,037)   | 336 (1,272)   | 274 (1,037)   |
| - Maximum Friction Head   | gpm (L/min)                | 284 (1,075)   | 209 (791)     | 284 (1,075)   | 209 (791)     |
| <u>Engine Data</u>  |                            |               |               |               |               |
| Intake Air Flow   | ft <sup>3</sup> /min (L/s) | 4,321 (2,039) | 3,380 (1,595) | 3,894 (1,838) | 3,229 (1,524) |
| Exhaust Gas Temp - Dry Stack  | deg F (deg C)              | 748 (398)     | 907 (486)     | 708 (376)     | 901 (483)     |
| Exhaust Gas Flow  | ft <sup>3</sup> /min (L/s) | 9,307 (4,392) | 8,289 (3,912) | 8,202 (3,871) | 7,926 (3,741) |
| Air to Fuel ratio   |                            | 31.6:1        | 26:1          | 33.9:1        | 27:1          |
| Heat Rejection to Ambient   | BTU/min (kW)               | 7,150 (126)   | 6,810 (120)   | 6,020 (106)   | 6,265 (110)   |
| Heat Rejection to Jacket Coolant                                    | BTU/min (kW)               | 25,783 (453)  | 25,381 (446)  | 21,804 (383)  | 23,893 (420)  |
| Heat Rejection to Exhaust   | BTU/min (kW)               | 48,545 (854)  | 50,119 (881)  | 42,445 (746)  | 46,851 (824)  |
| Heat Rejection to Fuel*   | BTU/min (kW)               | 414 (7.3)     | 379 (6.7)     | 414 (7.3)     | 379 (6.7)     |
| <u>2P2L</u>   |                            |               |               |               |               |
| Heat Rejection to Aftercooler Coolant                               | BTU/min (kW)               | 24,467 (430)  | 18,186 (320)  | 19,509 (343)  | 16,461 (289)  |
| Aftercooler Water Flow at Stated Friction Head external to Engine   |                            |               |               |               |               |
| - 2.5 psi-2.5 psi Friction Head                                     | gpm (L/min)                | 168 (636)     | 137 (519)     | 168 (636)     | 137 (519)     |
| - Maximum Friction Head   | gpm (L/min)                | 150 (568)     | 116 (439)     | 150 (568)     | 116 (439)     |

\*This is the maximum heat rejection, not specified to the load listed.

End of Report