

## DATA SHEET

DIESEL GENERATOR 100KW

MODEL#FDK-CD125/H1

50HZ/1500RPM

CUMMINS MODEL: 6BTA5.9G2



### General Features:

- ♦ All qualified generator sets are subjected to a comprehensive performance test which includes 50% load, 70% load, 100% load, 110% load and to check, verify that all control systems, alarm and shut-down protection.
- ♦ Equipped with battery charger and 24V high performance maintenance-free lead-acid starting batteries and connecting cables.
- ♦ Stainless galvanized zinc plates with strong corrosion-proof.
- ♦ Vibration isolators between the engine/alternator and base frame.
- ♦ Equipped with industrial silencer and flexible exhaust hose.
- ♦ Designed to comply with ISO8528/GB2820.
- ♦ Powered by Cummins engine and coupled with Stamford alternator.
- ♦ Water jacket preheater, oil heater and double air cleaner, etc. are available.

### FDK Diesel Generator Set Data

Genset Model	FDK-CD125/H1
Prime Power	92KW/112KVA
Standby Power	100KW/125KVA
Output Frequency / Rated speed	50Hz/1500rpm
Rated Voltage	230V/400V

Engine Make	Cummins
Engine Model	6BTA5.9G2
Alternator model	Stamford UCI274D
Control System	DSE6020
Phase	Three

(1) **Prime power:** The rating is available for an unlimited of annual operating hours in variable load applications, in accordance with ISO8528-1.A 10% overload is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046-1.

(2) **Standby power:** The rating is applicable for supplying emergency power in variable load applications for up to 200 hours per year in accordance with ISO8528-1. Overload is not allowed.

(3) **Rated voltage:** available with customer requirement.

### Engine Specifications (DETAILED in APPENDIX)

Engine Model	6BTA5.9G2
Engine Manufacturer	Cummins (China Dongfeng)
Cylinder quantity	6
Cylinder Arrangement	Not available
Cycle	Not available

Aspiration	Turbo-charged
Bore x Stroke (mm x mm)	102×120
Displacement	5.9L
Compression Ratio	17.3:1
Prime power / Speed (KW/RPM)	106/1500
Standby power/ Speed (KW/RPM)	116/1500



Speed governor	GAC	Fuel Consumption at 100% load (g/KWh)	211 at 1500rpm
Piston Speed	6.0m/s	Starter motor	DC24V
Friction Energy Output	12.7kw	Alternator	DC24V
Total Lubrication System Capacity (L)	16.3	Low idle	750-850rpm
Coolant Capacity (L)	10		

## Alternator Specifications

Alternator model	UCI274D	Number of phase	3
Alternator manufacturer	STAMFORD	Rated voltage	400V (Available with custom requirements)
Exciter type	Single bearing, Brushless, Self-excited	Power factor	0.8
Rated output prime power	120 KVA	Voltage regulation NL-FL	≤±1%
Rated speed	1500 rpm	Insulation grade	H
Rated frequency	50Hz	Protection grade	IP23

## Alternator option: Leroy Somer, MECC, Marathon, Engga, Faraday

## Control System DSE6020 (DETAILED in INSTRUCTION)

DSE6020 is an advanced control module based on micro-processor, containing all necessary functions for protection of the genset and the breaker control. It can monitor the mains supply, breaker control and automatically start the engine when the mains are abnormal. Accurately measure various operational parameters and display all values and alarms information on the LCD. In addition, the control module can automatically shut down the engine and indicate the engine failure.

### FEATURES

- Microprocessor control, with high stability and credibility.
- Monitoring and measuring operational parameters of the mains supply and genset.
- Indicating operation status, fault conditions, all parameters and alarms.
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable.
- Real time clock for time and date display, overall runtime display, 250 log entries.
- Overall power output display.
- Integral speed/frequency detecting, telling status of start, rated operation, overspeed etc.
- Communication with PC via RS485 OR RS232 interface, using MODBUS protocol.

## Soundproof Enclosure Specification

FDK silent generator is designed by professional acoustic engineers based on years of experience. Now we can make the noise of the generator less than 80-85dB(A) at 1m, or 70-75dB(A) at 7m, 60-65dB(A) at 15m.

### FEATURES

- Multi-way air intake and exhaust guarantee the power performance of the generator.
- Large-scale impedance combined type silencer effectively reduce noise of the generator.
- Internal high performance rubber damper and flexible materials reduce vibration.
- Base mounted fuel tank supports the generator running for 8 hours.



## Optional

Generator set	Alternator	Low environment Temp	ATS
<input type="checkbox"/> Open generator set <input type="checkbox"/> Silent generator set <input type="checkbox"/> Trailer generator set <input type="checkbox"/> ABB MCCB circuit breaker	<input type="checkbox"/> Stamford <input type="checkbox"/> Marathon <input type="checkbox"/> Mecc Alte <input type="checkbox"/> Leroy Somer <input type="checkbox"/> Farady <input type="checkbox"/> Engga	<input type="checkbox"/> Water heater <input type="checkbox"/> Oil heater <input type="checkbox"/> Battery heater	<input type="checkbox"/> CHINT <input type="checkbox"/> SCHNEIDER <input type="checkbox"/> ABB
Fuel system	Control system	Voltage	Synchronized system
<input type="checkbox"/> 12hrs base tank <input type="checkbox"/> 24hrs base tank <input type="checkbox"/> Dual wall base fuel tank <input type="checkbox"/> Outside fuel tank	<input type="checkbox"/> AMF function <input type="checkbox"/> ATS control cabinet <input type="checkbox"/> DSE7320 <input type="checkbox"/> DSE7510 <input type="checkbox"/> GU620A	<input type="checkbox"/> 415/240V <input type="checkbox"/> 400/230V <input type="checkbox"/> 380/220V <input type="checkbox"/> 220/127V <input type="checkbox"/> 200/115V	<input type="checkbox"/> CHINT Cabinet <input type="checkbox"/> SCHNEIDER Cabinet <input type="checkbox"/> DSE8610 Module <input type="checkbox"/> COMAQ Module <input type="checkbox"/> DEIF Module

## Dimension & Weight

### Open

Overall Size: L×W×H (mm)	2350×800×1300
Weight (kg)	1100

### Soundproof Version

Overall Size: L×W×H (mm)	3200×1150×1800
Weight (kg)	1800

## Sales Promises

- ◆ FDK provides a full line of brand new and high quality products. Each and every unit is strictly factory tested before shipment.
- ◆ Quality warranty is according to our standard conditions: 12 months from BL date or 1000 running hours, whichever comes first.
- ◆ Service and parts are available from FDK or distributors in your location.
- ◆ FDK guarantee use **BRAND NEW & GENUINE MACHINE.**



# Dongfeng Cummins Technical Operations



ENGINE MODEL: 6BTA5.9-G2  
CURVE & DATASHEET: FR93269

REV 00 24OCT2012



**Generator Engine Performance Data**  
**DONGFENG CUMMINS ENGINE Co.,LTD**  
 Xiangfan, Hubei Province, China  
<http://www.dcec.com.cn>

Basic Engine Model:  
**6BTA5.9-G2**  
**FR93269**

**FR93269 @ 1500RPM &1800RPM**

Configuration	CPL Code	Revision
D403050DX02	CPL: 2697	2012/10/24

Compression Ratio:	<b>17.3:1</b>	Aspiration:	<b>Turbocharged &amp; Aftercooled</b>
Bore:	<b>102 mm</b>	Displacement:	<b>5.9 L</b>
Stroke:	<b>120 mm</b>	No. of Cylinders:	<b>6</b>
Emission Certification:	<b>MEP STAGE I</b>	Fuel System:	<b>BYC PB/ Electronic Governor</b>
Governor Regulation:	<b>≤3%</b>		


All data is based on the engine operating with fuel system, water pump, and 15.2 in H<sub>2</sub>O (3.7 kPa) inlet air restriction with 5.98 in (152mm) inner diameter, and with 3in Hg (10 kPa) exhaust restriction with 4.02 in (102 mm) inner diameter; not included are alternator, fan, optional equipment and driven components. Coolant flows and heat rejection data based on coolants as 50% ethylene glycol/50% water. All data is subject to change without notice.

Engine Speed	Standby Power		Prime Power		Continuous Power	
	kW	HP	kW	HP	kW	HP
1500	116	155	106	142	56	75
1800	132	177	120	161	TBD	TBD

**Engine Performance Data @ 1500 RPM**

OUTPUT POWER			FUEL CONSUMPTION	
%	kW	HP	g/kW.h	L/h
<b>STANDBY POWER</b>				
100	116	155	212	30
<b>PRIME POWER</b>				
100	106	142	211	27
75	80	107	212	20
50	53	71	219	14
25	27	36	248	8
<b>CONTINUOUS POWER</b>				
100	56	75	218	15


Litre/hour

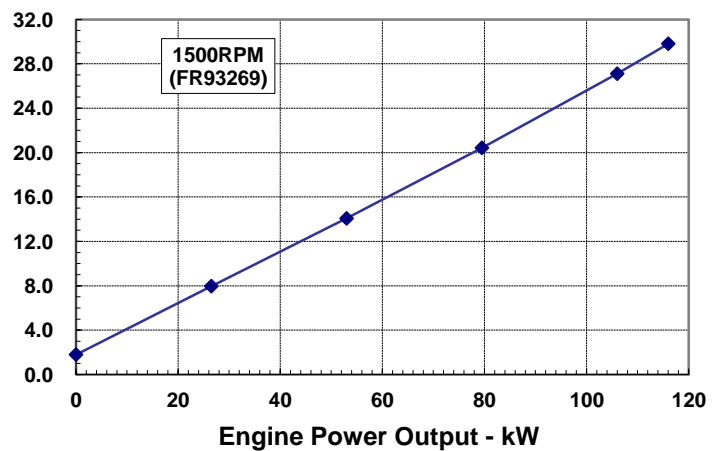

**Engine Performance Data @ 1800 RPM**

OUTPUT POWER			FUEL CONSUMPTION	
%	kW	HP	g/kW.h	L/h
<b>STANDBY POWER</b>				
100	132	177	215	34
<b>PRIME POWER</b>				
100	120	161	211	31
75	90	121	212	23
50	60	80	223	16
25	30	40	264	10
<b>CONTINUOUS POWER</b>				
TBD	TBD	TBD	TBD	TBD

Litre/hour

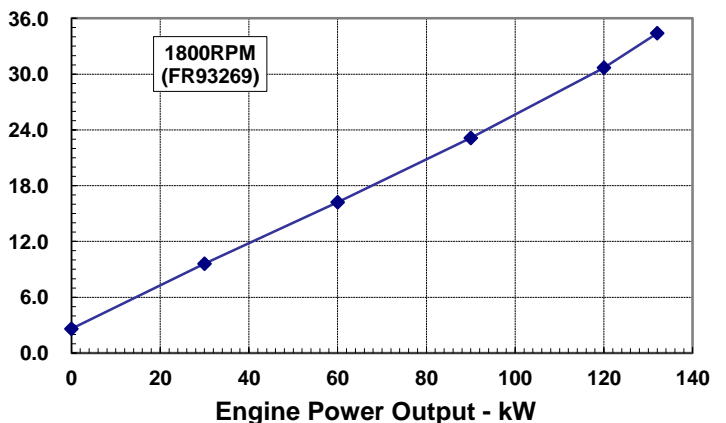

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with GB/T18297 conditions of 100kPa (29.61 in. Hg) barometric pressure, 25°C (77°F) inlet air temperature, and 1 kPa (0.30 in. Hg) water vapor pressure with No.0 diesel fuel. The engine may be operated without changing the fuel setting up to 2200 m ( 7218ft.) altitude.

**GENERAL ENGINE DATA**

Approximate Engine Weight (wet).....	-kg	435
Mass Moment of Inertia of Rotating Components (No Flywheel).....	-kg·m <sup>2</sup>	0.25
Center of Gravity from Front Face of Block.....	-mm	391
Center of Gravity above Crankshaft Centerline.....	-mm	140
Crankshaft Thrust Bearing Load Limit		
—Maximum Intermittent.....	-N	3425
—Maximum Continuous.....	-N	1112

**ENGINE MOUNTING**

Maximum (Static) Bending Moment at Front Support Mounting Surface.....	-N.m	435
Maximum (Static) Bending Moment at Side Pad Mounting Surface.....	-N.m	TBD
Maximum (Static) Bending Moment at Rear Face of Block.....	-N.m	1356
Moment of Inertia of Complete Engine		
— Roll Axis.....	-kg·m <sup>2</sup>	16.5
— Pitch Axis.....	-kg·m <sup>2</sup>	41.1
— Yaw Axis.....	-kg·m <sup>2</sup>	35.4

**EXHAUST SYSTEM**

Maximum Back Pressure.....	-kPa	10
Exhaust Pipe Size Normally Acceptable.....	-mm	75
Maximum Static Supported Weight at the Turbocharger Outlet Flange.....	-N.m	13.5
Exhaust Manifold Insulation Acceptable.....	-Yes/No	No
Turbocharger Insulation Acceptable.....	-Yes/No	No

**AIR INTAKE SYSTEM**

Maximum Intake Air Restriction with Heavy Duty Air Cleaner		
— Dirty Element.....	-kPa	6
— Clean Element.....	-kPa	3.7
Minimum Dirt Holding Capacity with Heavy Duty Air Cleaner.....	-g/cfm	53
Maximum Temperature Rise from Ambient to the Inlet of the Turbocharger....	-°C	17
Recommended intake piping size (inner diameter).....	-mm	76

**LUBRICATION SYSTEM**

Minimum Engine Oil Pressure for Engine Protection Devices:		
—Idle Speed.....	-kPa	207
—Governed Speed.....	-kPa	345
Maximum Oil Temperature.....	-°C	121
Oil Capacity with OP 9006 Oil Pan : High - Low.....	-litre	14.2 - 12.3
Minimum Required Lube System Capacity - Sump plus Filters.....	-litre	16.4
Angularity of Standard Oil Pan: (Values stated are for intermittent operation only):		
— Front Down.....	- °	40
— Front Up.....	- °	40
— Side to Side.....	- °	40

**FUEL SYSTEM**

Type Injection System.....		BYC PB Direct Injection
Maximum Restriction at Lift Pump.....	-kPa	13.6
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head)		
.....	-kPa	67.7
Total Drain Flow (constant for all loads).....	-litre/hr	30

**COOLING SYSTEM**

Coolant Capacity - Engine Only.....	-litre	10
Maximum Coolant Friction Head External to Engine... -1800 rpm.....	-kPa	35
—1500 rpm.....	-kPa	28
Maximum Static Head of Coolant Above Engine Crank Centerline.....	-m	14
Standard Thermostat (Modulating) Range.....	-°C	82 - 95
Minimum Pressure Cap.....	-kPa	69
Maximum Top Tank Temperature for Standby / Prime Power.....	-°C	104 / 100

**ELECTRICAL SYSTEM**

Cranking Motor (Heavy Duty, Positive Engagement).....	-volt	12V	24V
Battery Charging System, Negative Ground.....	-ampere	63	40
Maximum Allowable Resistance of Cranking Circuit.....	-ohm	0.00075	0.002
Minimum Recommended Battery Capacity			
• Cold Soak @ 10 °F (-12 °C) and Above.....	-0°F CCA	800	400

**EMISSIONS**

Gaseous Emissions per GB 20891-2007, at 1500rpm:

—Weight-Specific NOx.....	g/kW.h	9.2
—Weight-Specific HC.....	g/kW.h	1.3
—Weight-Specific CO.....	g/kW.h	5.0
—Weight-Specific Particulates.....	g/kW.h	0.54

Gaseous Emissions per GB 20891-2007, at 1800rpm:

—Weight-Specific NOx.....	g/kW.h	9.2
—Weight-Specific HC.....	g/kW.h	1.3
—Weight-Specific CO.....	g/kW.h	5.0
—Weight-Specific Particulates.....	g/kW.h	0.54

Fuel Rating Option used for these Data: **FR93269**

Governed Engine Speed.....	-rpm
Engine Idle Speed.....	-rpm
Gross Engine Power Output.....	-kW
Piston Speed.....	-m/s
Friction Horsepower.....	-kW
Engine Water Flow to Engine:.....	-litre/sec.
Intake Air Flow.....	-litre/sec.
Exhaust Gas Flow.....	-litre/sec.
Exhaust Gas Temperature.....	-°C
Air to Fuel Ratio.....	-air:fuel
Radiated Heat to Ambient.....	-kW
Heat Rejection to Coolant.....	-kW
Heat Rejection to Exhaust.....	-kW

STANDBY POWER		PRIME POWER	
1800	1500	1800	1500
750 - 850	750 - 850	750 - 850	750 - 850
132	116	120	106
7.2	6	7.2	6
16.4	12.7	16.4	12.7
2.4	2.0	2.4	2.0
142	118	140	112
406	334	381	305
580	570	540	540
23.3 : 1	22.4 : 1	25.7 : 1	23.4 : 1
20	18	18	16
71	66	63	59
112	94	96	82

ALL DATA CERTIFIED WITHIN 5%

TBD = To Be Decided

N/A = Not Applicable

N.A. = Not Available

All data is subject to change without notice, sorry for inform.

Dongfeng Cummins Engine Co., Ltd.